
Temperature -25 °C to +60 °C	**Terminal holder** Self-extinguishing material
Rated voltage 400 V a.c. / 1000 V d.c.	**UV resistance** /
Base PS	**Glow wire test** 650 °C
Front mask ABS, RAL 9003	**Glow wire test of terminal holder** 960 °C
Door MABS, Transparent / ABS, RAL 9003	**Tested according to standard** IEC 62208

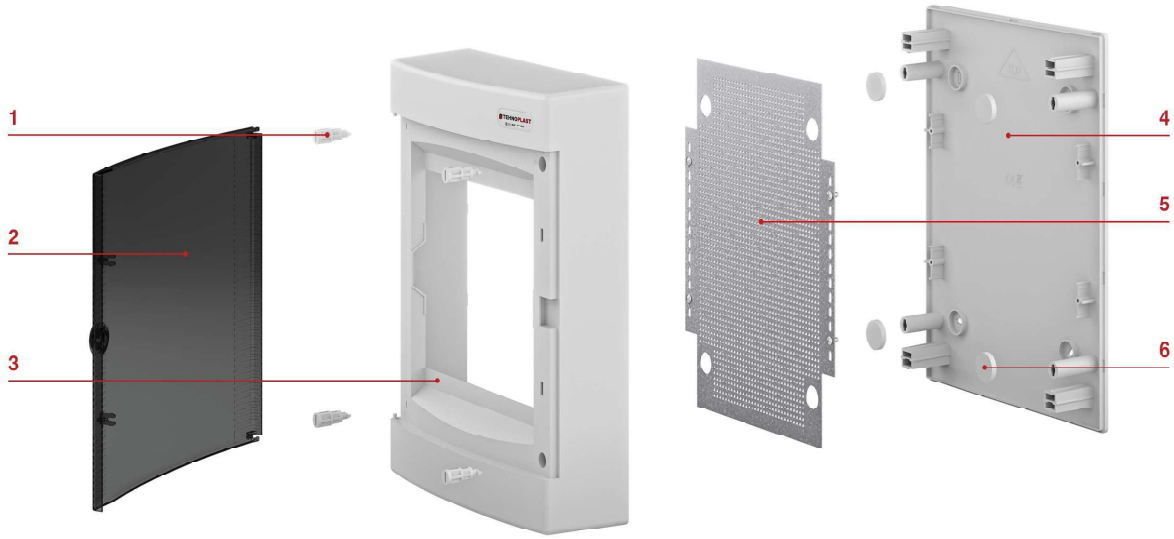

1	Plastic screw	4	Base
2	Door	5	Mounting plate, perforated
3	Front mask	6	Protective cap

Accessories

Included


Mounting plate, perforated


Installation accessories


Assembly instruction

Optional


Double socket outlet with holder


Triple socket outlet


Connection bracket, horizontal


Connection bracket, vertical


Connection bracket, horizontal 2

Holder for Wi-Fi router


Lock for enclosure


Patch panel for 12 RJ45 modules